


10606 - Medium-Light Duty Manual Stud Installer



Optional adapter sizes are available.

Safety Warning & Cautions:

1. **KEEP WORK AREA CLEAN.**
Cluttered areas invite injuries.
2. **USE EYE PROTECTION.**
Always wear approved impact safety glasses or goggles when working with tools.
3. **STAY ALERT.**
Watch what you are doing. Don't operate this tool if you are unsure of its application and use.

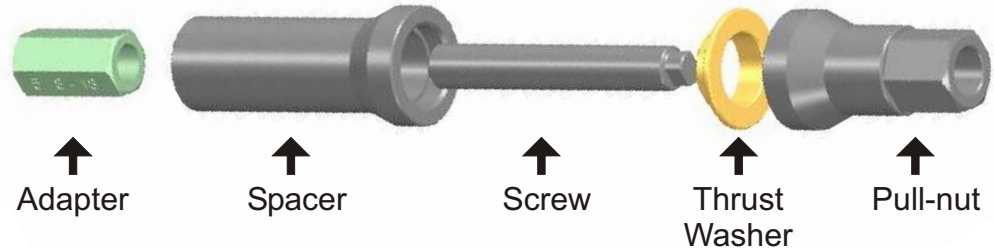

OPERATING INSTRUCTIONS

1. Select correct adapter to fit thread size on new stud.
2. All adapters are 3/4-10 thread on one end. Install this end onto 3/4-10 stud on the screw and tighten securely.
3. Place new stud through the hole aligning old knurl marks in the hub with the knurl on the new stud. This will ease installation of the new stud.
4. Now thread the screw adapter assembly onto the new stud.
5. Slide the spacer/washer assembly over the screw with the brass washer end towards you, away from the stud.
6. Screw the pull-nut onto the screw assembly and run it down until it locates into the brass washer.
7. Apply impact gun and tighten pull-nut until stud is drawn in tight.

NOTE: Keep the threads of the screw, pull-nut and washer surface clean and lubricated at all times to lessen friction. Use quality oil on threads. We do not recommend using anti-seize!

TIGER TOOL
International Headquarters
1-800-661-4661